


A2X

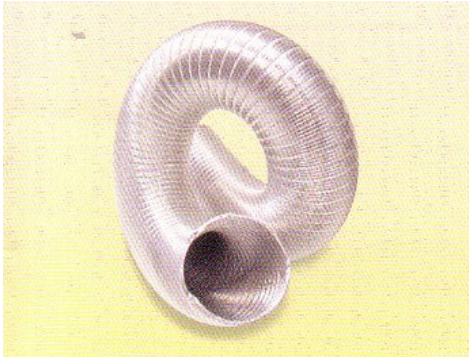

A bendable semi-flexible pure aluminum duct, suitable for low or medium and pressure air conditioning, ventilation and exhaust systems. Standard SEMIDEC is supplied in 3 meters length, which is compressed to 1.2 meters carton box.

Technical Specification

Material Structure	:	1 Aluminum Layer
Construction	:	115 Microns of spirally corrugated aluminum
Temperature range	:	- 30 °C to +250 °C
Maximum Working Pressure	:	750 mm W.G.
Maximum Air Velocity	:	30 meters/sec
Size Availability	:	Diameter from 76 mm. to 610 mm. (3 ins. to 24 ins.)
Standard length	:	5 meters packed
Standard color	:	Aluminum
Applications in practice	:	Mechanical air supply systems Air conditioning systems Systems, where vapours should be exhausted Above mentioned systems, where a special mechanical strength is required.

Technical specification are subject to change without notice.

Manufacturing By : Union Precision Engineering Co.,Ltd.
24/33 Moo 6 Bangna-Trad Rd., K.M. 24 Bangsaothong, Samuthprakarn 10540
Distributed By : G-Plus Trading Co.,Ltd. Tel. 740-1035 www.g-plus.co.th